







UL RECOGNIZED RECEPTACLE
 POLARIZED FOR 48 VOLT AND
 45 AMP CONTACTS FOR 10 GA WIRE
 FOR USE ON INFORMATION TECHNOLOGY
 EQUIPMENT.

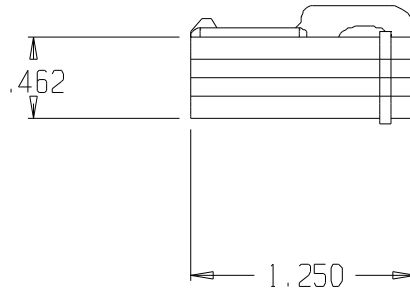

CONTACT CAT. NO. BS1014



EAD FILE NO:2000100410

UNLESS OTHERWISE SPECIFIED DIMENSIONS
 ARE IN INCHES. (MM) TOLERANCES ARE
 FRACTIONS DECIMALS ANGLES



W. T. STOREY INC.
 DALMATIA, PA.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	VERIFIED DIMENSIONS	10-4-01	EJR

00	+0.25	[.00] ± .01
000	+0.127	[.000] ± .005
		[.0000] ± .0005
MATERIAL		HEAT TREAT
LEXAN 94D		
PART NO.		48CA45US
DWG. NO.		200010041D
00 NOT SCALE DRAWING		

PART NAME:		CABLE CONNECTOR	
		48 V, 45 A, 10 GA	
SCALE:	J-1	SIZE:	A
DRAWN BY:		D.J.G.	
DATE:	10-4-2000	ISSUE	2
©	2000	FILE:	